

ActualVCE

- ✓ 24/7 customer support, Secure shopping site
- ✓ Free One year updates to match real exam scenarios
- ✓ If you failed your exam after buying our products we will refund the full amount back to you.

[Download Demo](#)



ONLINE TEST ENGINE
Online
Best Practice Material

- ✓ Online Tool, Convenient, easy to study.
- ✓ Instant Online Access
- ✓ Supports All Web Browsers
- ✓ Practice Online Anytime
- ✓ Test History and Performance Review
- ✓ Supports Windows / Mac / Android / iOS, etc.



DESKTOP TEST ENGINE
Soft
Best Practice Material

- ✓ Installable Software Application
- ✓ Simulates Real Exam Environment
- ✓ Builds Exam Confidence
- ✓ Supports MS Operating System
- ✓ Two Modes For Practice
- ✓ Practice Offline Anytime



PRACTICE PDF
PDF
Best Practice Material

- ✓ Printable PDF Format
- ✓ Prepared by IT Experts
- ✓ Instant Access to Download
- ✓ Study Anywhere, Anytime
- ✓ 365 Days Free Updates
- ✓ Free PDF Demo Available



Security & Privacy

ActualVCE respect customer privacy. We use McAfee's security service to provide you with utmost security for your personal information & peace of mind.



Instant Download

After Payment, our system will send you the products you purchase in mailbox in a minute after payment. If not received within 2 hours, please contact ActualVCE.



365 Days Free Updates

Free update is available within 365 days after your purchase. After 365 days, you will get 50% discounts for updating.



Try Before Buy

ActualVCE offers free demo of each product. You can check out the interface, question quality and usability of our practice exams before you decide to buy.

<http://www.actualvce.com/>

Believable Exam Dumps Questions grant you ensured success by your first attempt - ActualVCE

Exam : E22-250

Title : Network Management - Smarts Administration

Vendors : EMC

Version : DEMO

1. A switch appears down in Service Assurance Manager. After trying to troubleshoot the problem, an operator finds out that the switch has been removed from service. Why didn't this switch automatically become Unmanaged in Smarts?

- A. IP Availability Manager needs to be restarted to remove this switch.
- B. Other devices that were connected to this switch are still reachable by Smarts.
- C. This switch requires rediscovery.
- D. Unmanaging devices is a manual process.


Answer: D

2. Which relationship exists between a card and its ports?

- A. ConnectedVia/ConnectedTo
- B. PackagedIn/Packages
- C. Realizes/RealizedBy
- D. Underlying/LayeredOver

Answer: C

3. Click the Exhibit button. A router monitored by these polling settings has just been polled, and the operational status of Interface A is DOWN. Ten seconds after the initial poll, the interface operational status changes to UP. How long will it take from the last poll for the IP Domain Manager to set this interface's status to UP?

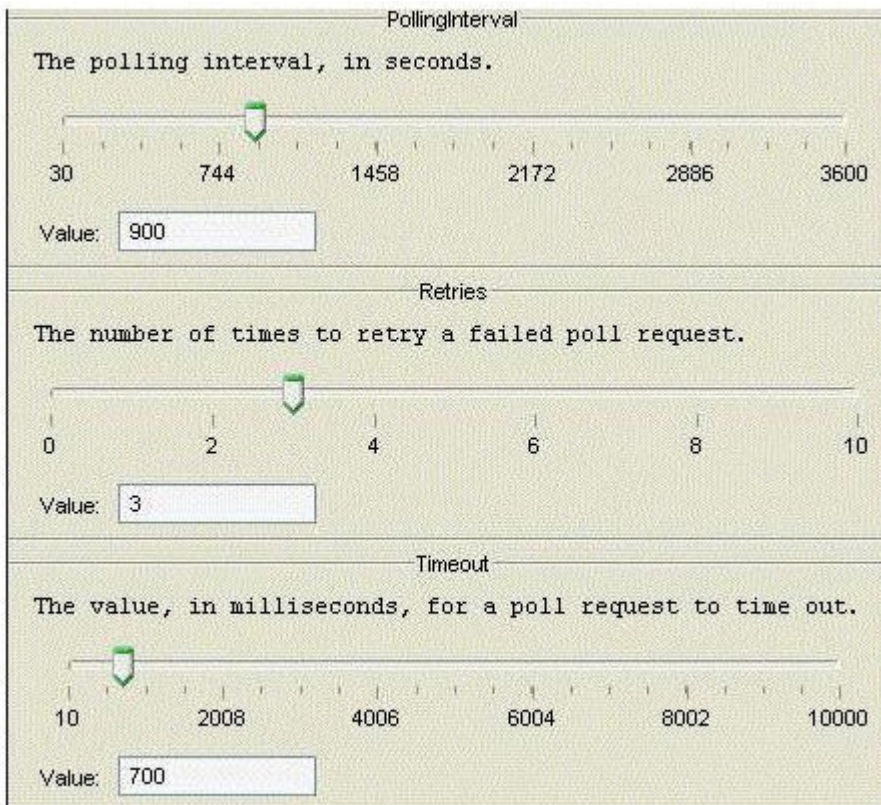

The image shows three configuration sliders from a network management interface. The first slider is labeled 'PollingInterval' and is described as 'The polling interval, in seconds.' The scale ranges from 30 to 3600 with major ticks at 30, 744, 1458, 2172, 2886, and 3600. The value is set to 900. The second slider is labeled 'Retries' and is described as 'The number of times to retry a failed poll request.' The scale ranges from 0 to 10 with major ticks at 0, 2, 4, 6, 8, and 10. The value is set to 3. The third slider is labeled 'Timeout' and is described as 'The value, in milliseconds, for a poll request to time out.' The scale ranges from 10 to 10000 with major ticks at 10, 2008, 4006, 6004, 8002, and 10000. The value is set to 700.

- A. 15 minutes
- B. 700 milliseconds
- C. 9 seconds
- D. 900 minutes

Answer: A

4. Which relationship exists between a card and its ports?

- A.ConnectedTo/ConnectedVia
- B.HostsAccessPoints/HostedBy
- C.MemberSystems/MemberOf
- D.Realizes/RealizedBy

Answer:D

5.Which information is needed by IP Availability Manager to communicate with an EMC Celerra NAS in addition to its IP address?

- A.Control Station port number
- B.Data Mover port number
- C.Port number
- D.Username, password

Answer:D

6.Oper1, a user, would like to share a saved map with other users. What does the admin need to do?

- A.Copy the saved map to \smarts\local\conf\console folder on the Global Manager
- B.Copy the saved map to \smarts\local\conf\consoles folder on the Global Manager
- C.Copy the saved map to \smarts\local\console folder on the Global Manager
- D.Copy the saved map to \smarts\local\consoles folder on the Global Manager

Answer:D

7.Which Performance Monitor Setting will give early warning that an interface is too busy?

- A.IPThreshold
- B.Restart Trap Window
- C.UnicastThreshold
- D.UtilizationThreshold

Answer:D

8.The EMEA NOC, America NOC, and Asia NOC each has visibility to regional NOCs. Each regional NOC implements one or more Smarts applications and uses its own Smarts Service Assurance Manager to provide an end-to-end view of the region. What needs to be configured to architect EMC Smarts solutions to view all regions?

- A.Hierarchical SAM configuration
- B.Smarts Aggregation Adapter
- C.Smarts Topology Split Manager
- D.Standard SAM configuration

Answer:A

9.What does the context filter determine when defining a tool?

- A.If the tool is grayed out
- B.If the tool is visible
- C.The acceptable state for tool use
- D.Which attributes are passed

Answer:B

10.A new Windows 2003 Enterprise Server from Vendor XYZ needs to be discovered. The Smarts admin created an entry for this server in oid2type_Field.conf. .1.3.6.1.4.1.9999.1.12 { TYPE = Switch VENDOR = XYZ MODEL = Widget5550 CERTIFICATION = TEMPLATE INSTRUMENTATION: Interface-Fault = MIB2 Interface-Performance = MIB2 } After discovering this new server, which class will it be part of?

- A.Host

B.It will not be added to the topology

C.Node

D.Switch

Answer:D

11.Which relationship of a switch is expanded to view the instances of its ports, in the Topology Browser?

A.ComposedOf

B.HostConnectionPoints

C.Overlaying

D.PartOf

Answer:A

12.There is a firewall between the servers on which the Domain Managers are running. You are troubleshooting a connectivity issue with the Smarts deployment. Which command is used to verify the TCP ports on which the Domain Managers are listening?

A.brcontrol

B.sm_ping

C.sm_service show

D.sm_what

Answer:A

13.Which sm_server parameters are required when starting a Service Assurance Manager?

A.--name and --config

B.--name and --port

C.--server and --config

D.--server and --port

Answer:A

14.An organization is looking for a way to effectively scale in an intricate heterogeneous IT environment. Which part of the Smarts A3 architecture will minimize the manual effort to accomplish this goal?

A.Automation

B.Abstraction

C.Analytics

D.Analysis

Answer:B

15.Which command can be used in a script that will stop the Service Assurance Manager SMARTS-SA?

A.dmquit -s SMARTS-SA --force

B.dmquit -n SMARTS-SA --norestore

C.sm_quit -n SMARTS-SA --norestore

D.sm_quit -s SMARTS-SA --ignore

Answer:A

16.At a customer site, many different networks are being managed by a single IP domain, which is generating many DuplicateIP alerts in SAM. How can you avoid these DuplicateIP alerts?

A.Filter the Duplicate network

B.Use a different IP-AM for each network

C.Use a different SAM for each network

D.Use IP Tagging

Answer:D

17. To ensure that Discovery probes every IP address on a Class B IP network you set the Discovery filter to 10.1.*.*. However, you see that most devices in that range have not been discovered. Why?

- A. MaximumHostBits parameter in discovery.conf is set to 8 by default.
- B. Some of those IP addresses do not exist.
- C. The systems have been throttled and placed on the Pending Device List.
- D. You have run out of licenses.

Answer:A

18. A root-cause problem is presented that states one of a router interfaces is down. What is the underlying issue?

- A. Router interface is administratively down and operationally down.
- B. Router interface is administratively up and operationally down.
- C. Router is completely down.
- D. SNMP Agent on that router is not responding.

Answer:B

19. Click the Exhibit button. The current weights.conf file contains: ClassWeight ICIM_ManagedElement 1
Which impact value would be calculated for this Router Down problem?

ClassWeight	1
UnitaryComputerSystem	100
ClassWeight Router	1000
InstanceWeight Host *smarts.com*	1000
InstanceWeight Router *moto*	1000
InstanceWeight Router *gw*	10000

- A. 102
- B. 1000
- C. 1002
- D. 10002

Answer:C

20. A customer's environment has many different networks that are being managed by Smarts. As a result of this there are many DuplicateIP notifications. What is an effect on Smarts of having DuplicateIP notifications?

- A. Each duplicated IP object is unmanaged.
- B. IP Domain Manager polls twice as often.
- C. Network connections will not be represented correctly.
- D. Root-cause analysis of other events will be correlated to these Duplicate IPs.

Answer:A